


QUICK OVERVIEW: STRENGTHS

The dry seal against passage of air

- Sealing gasket
- Soft and elastic, foldable and easy adaptable for all applications
- Resistant to expansion and vibrations
- Sealing against air wind and water for all interruptions
- Quick and easy application

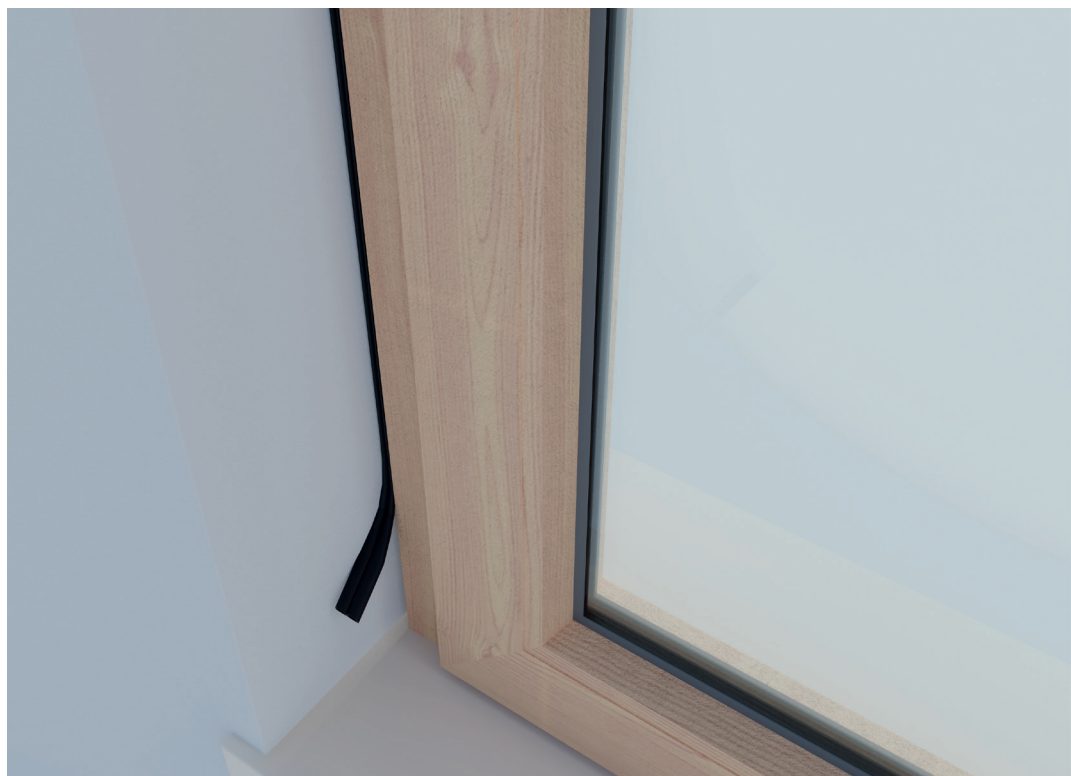

①


Composition:

- ① Expanded EPDM

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
GAE D2	02045010	30x50 (extended)	8	5

Features:

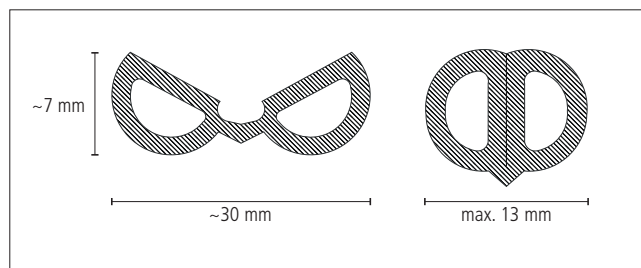

Technical data sheet

Material		expanded EPDM
Density		0,5 g/cm ³
Thickness (extended seal)		7 mm (compr. max. 2 mm)
Thickness (folded seal)		13 mm (compr. max. 4 mm)
Working temperature		-45°C / +120°C
Storage place		dry, protected from UV rays
Storage period		max. 24 months