



QUICK OVERVIEW: STRENGTHS

The essential for wooden joints

- Sealing gasket
- Waterproofing to air, water and wind of the connections in the wooden houses
- Resistant to dilatation and vibrations due to its high elasticity
- Also ideal for sealing of the lower joint of the windows and doors

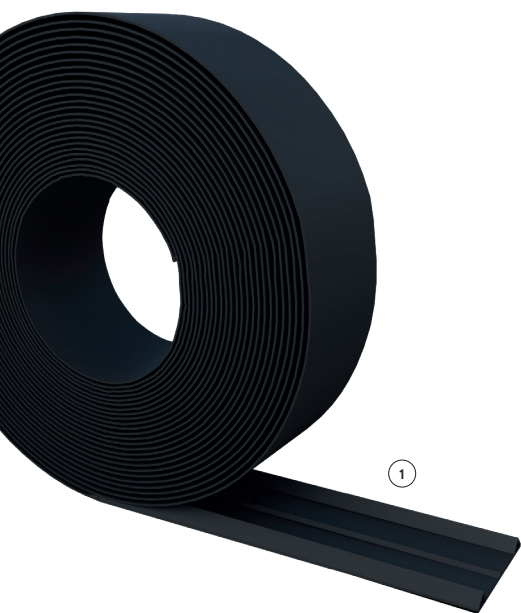

Features:

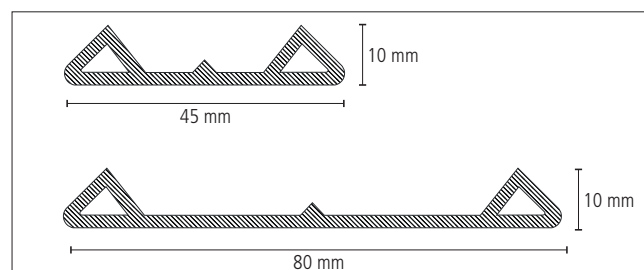

Composition:

- ① Expanded elastic EPDM

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
GAE LVD 45	020450071	45x25	20	1
GAE LVD 80	02045007	80x25	12	1

Technical data sheet

Material		expanded EPDM
Side overhangs height		~10 mm
Density		0,5 g/cm ³
Working temperature		-45°C / +120°C
Storage place		dry, protected from UV rays
Storage period		max. 24 months