





## QUICK OVERVIEW: STRENGTHS

### Stop the spread of noise

- Sealing gasket
- Stops the passage of footstep vibrations for a better noise reduction
- Waterproofing to air, water and wind of the connections in the wooden houses
- Divisible in half for one use versatile in all laying conditions
- Quick and easy application

### Features:

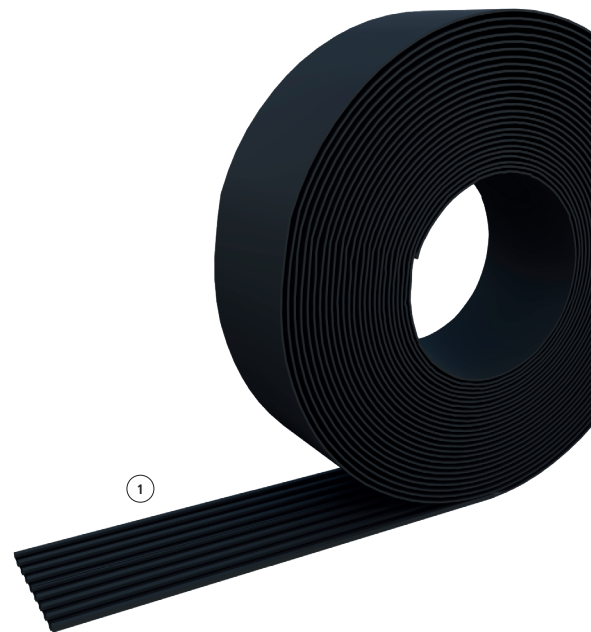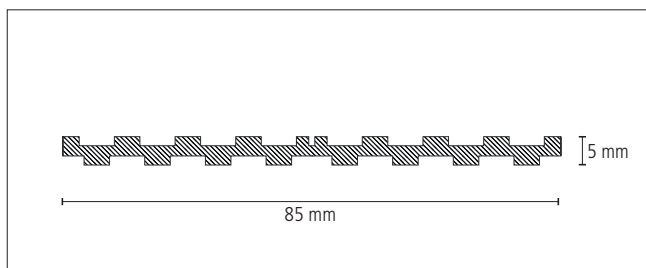

### Technical data sheet

Material		rigid EPDM
Thickness		5 mm
Density		1,3 g/cm <sup>3</sup>
Elongation at break	ISO 37 Tipo 1	≥250 %
Breaking load	ISO 37 Tipo 1	≥5 N/mm <sup>2</sup>
Hardness (Shore A)	ASTM D 2240 3s	60
100% module		≥1,5 N/mm <sup>2</sup>
Working temperature		-45°C / +130°C
Storage place		dry, protected from UV rays
Storage period		max. 24 months

### Composition:

Compact EPDM ①

### Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
GAE STG Double	020450081	85 (42,5x2) x25	12	4