



## QUICK OVERVIEW: STRENGTHS


### The self-adhesive vapour control layer

- Vapour control layer, adhesive on the entire surface
- Protection of walls, floors and roofs under construction
- Acrylic dispersion based adhesive

### Features:



### Classification:

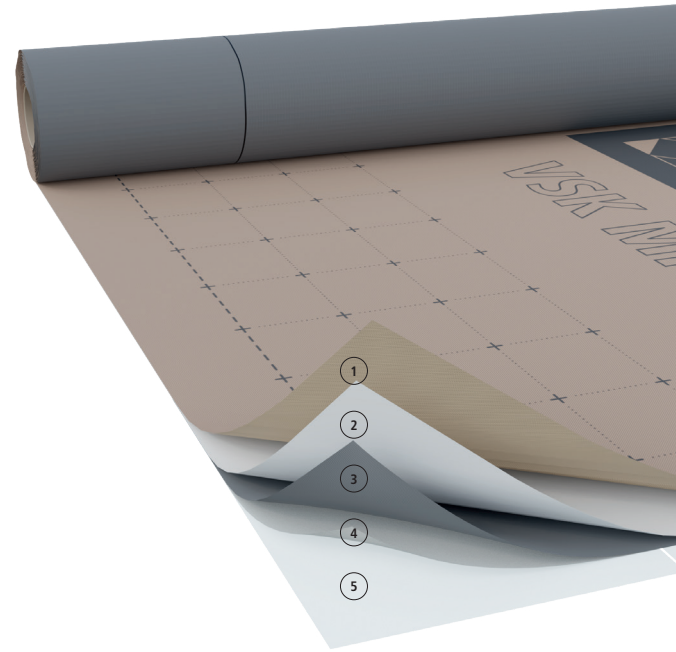

### Technical data sheet

Material	PP.PP.PP	
Film	PP	
Colour	Beige	
Use underneath PV panels	-	
Mass per unit area	EN 1849-2	255 g/m <sup>2</sup>
Glue	disp. based polyacrylate	
Glue weight	100 g/m <sup>2</sup>	
Pre-cutted liner	125 + 25 cm	
Sd value	EN ISO 12572	>2 m
Water vapour permeability	EN ISO 12572	~ 15 g/m <sup>2</sup> /24 h
Water column	EN 20811	>550 cm
Water tightness	EN 13984	passed
Tensile strength MD/CD*	EN 12311-1	310 / 240 N50 mm
Elongation MD/CD*	EN 12311-1	70 / 80 %
Tear resistance MD/CD*	EN 12310-1	190 / 230 N
Fire reaction class	EN 13501-1	E
UV stability	4 months	
Temperature resistance	-40°/+100°C	
Working temperature	+5°/+40°C	

### Composition:

- Protective UV stabilized, water repellent layer in PP ①
- Functional film in PP ②
- Protective layer in PP ③
- Pure acrylic adhesive modified ④
- Re-cut liner 25/125 cm ⑤

### Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m <sup>2</sup> )
02065020	-	1,5	30	900

\*MD = longitudinal CD = transversal  
Riwega Srl is not responsible for negligent and improper use of its products